
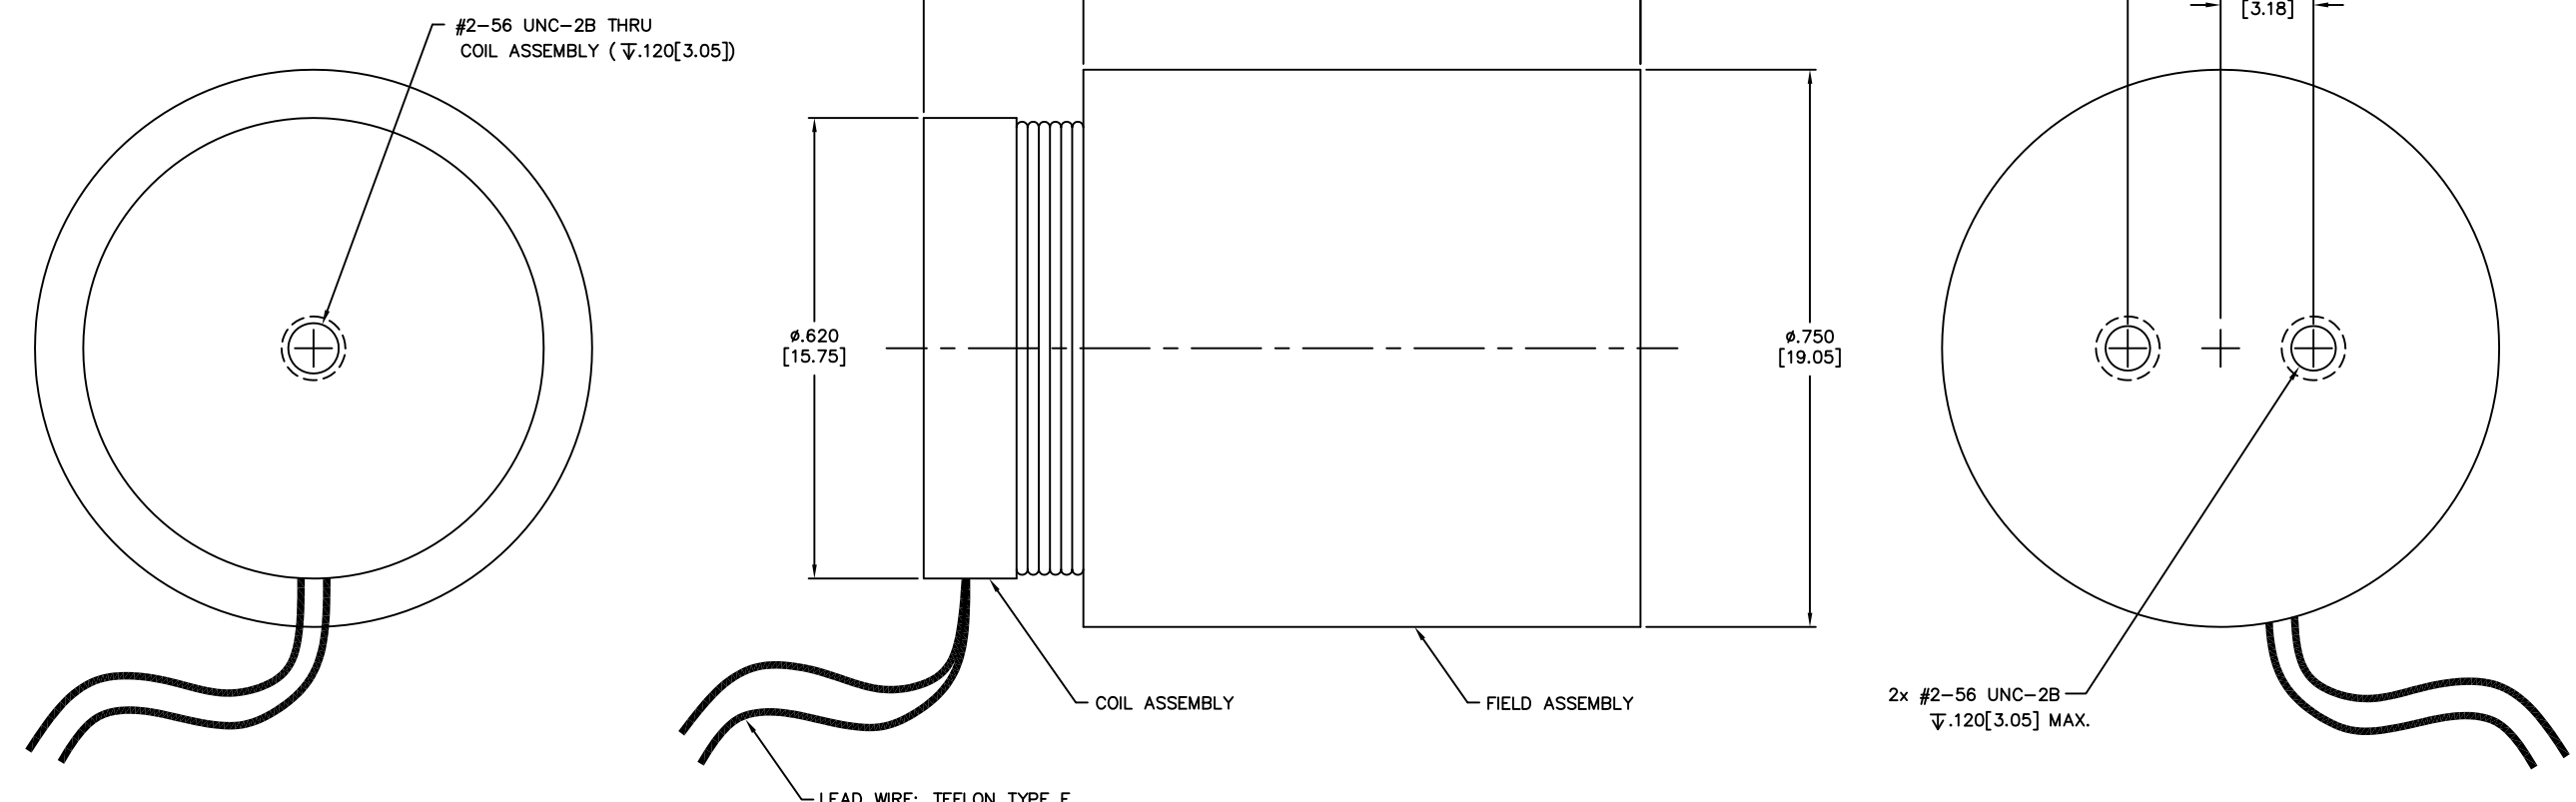


WINDING CONSTANTS *	UNITS	TOL	SYMBOL	WDG A	WDG B	WDG C
DC RESISTANCE	OHMS	±12.5%	R	1.28	4.05	10.03
VOLTAGE @ F _p	VOLTS	NOMINAL	V _p	7.8	13.9	22.0
CURRENT @ F _p	AMPERES	NOMINAL	I _p	6.08	3.42	2.19
FORCE SENSITIVITY	OZ/AMP	±10%	K _F	3.95	7.02	10.97
	N/AMP	±10%		1.1	1.95	3.05
BACK EMF CONSTANT	V/FT/SEC	±10%	K _B	0.335	0.595	0.93
	V/M/SEC	±10%		1.1	1.95	3.05
INDUCTANCE ****	MICRO-HENRY	±15%	L	250	791	1959

ZONE	REV	DCN NO.	DESCRIPTION	INITIALS	DATE	APPROVED
D	041907		UPDATE PARAMETERS	WPB	05/12/04	SH
E	060143		ADD RoHS LOGO	SLM	02/16/06	MG
F	060603		UPDATE TO INCLUDE B & C WDG	RG	12/01/06	MG
G	110251		UPDATE INDUCTANCE VALUES	SLM	11/14/11	MG

ACTUATOR PARAMETERS *	UNITS	SYMBOL	VALUE
PEAK FORCE **	OZ	F _P	24
	N		6.7
CONTINUOUS STALL FORCE ***	OZ	F _{CS}	7.09
	N		1.97
ACTUATOR CONSTANT	OZ/√WATT	K _A	3.49
	N/√WATT		0.97
ELECTRICAL TIME CONSTANT	MICRO-SEC	τ _E	195
MECHANICAL TIME CONSTANT	MILLI-SEC	τ _M	7.9
POWER I ² R @ F _p	WATTS	P _P	47.3
STROKE	± INCHES		0.080
	± MM		2.03
CLEARANCE ON EACH SIDE OF COIL	IN		0.015
	MM		0.38
THERMAL RESISTANCE OF COIL	°C/WATT	θ _{TH}	21
MAX. ALLOWABLE COIL TEMP.	°C	TEMP	155
WEIGHT OF COIL ASSEMBLY	OZ	WT _C	0.265
	G		7.51
WEIGHT OF FIELD ASSEMBLY	OZ	WT _F	0.95
	G		26.9

* MID-STROKE AND 25°C AMBIENT TEMPERATURE
 ** 10 SECONDS AT 25°C AMBIENT & 155°C COIL TEMP
 *** 25°C AMBIENT & 155°C COIL TEMPERATURE
 **** MEASURED AT 1000 Hz



LEAD WIRE: TEFLON TYPE E
 #28 AWG
 12.0[305] MIN. LONG
 2 PL
 (RED, BLK)

3. A POSITIVE (+) VOLTAGE APPLIED TO THE RED LEAD WILL PRODUCE A FORCE ON THE COIL ASSEMBLY IN THE POSITIVE (+) DIRECTION.
2. DIMENSION IN BRACKETS ARE MILLIMETERS [MM] AND ARE FOR REFERENCE ONLY.
1. INTERPRET DIMENSIONS & TOLERANCES PER ASME Y14.5M-1994.
- NOTES: UNLESS OTHERWISE SPECIFIED

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE IF EXPORTED FROM THE UNITED STATES SHALL BE IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

Proprietary rights of BEI Kimco are involved in the subject matter of this material and all manufacturing, reproduction, use, and sales pertaining to such subject matter are expressly reserved. This confidential and proprietary document is submitted for a specified purpose, and the recipient by accepting this material agrees that this material will not be used, copied, or reproduced in whole or in part nor its contents revealed in any manner or to any person except to meet the purpose for which it was delivered.

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED:
 -ALL DIMENSIONS ARE IN INCHES
 -BREAK SHARP EDGES .015 MAX.
 -SURFACE ROUGHNESS √125
 -DIMENSIONS APPLY AFTER FINISH
 -MAX FILLET R .010

TOLERANCES:
 DECIMALS: .X ± .03
 .XX ± .01
 .XXX ± .005
 ANGULAR: ±0° 30'
 DO NOT SCALE DRAWING

BEI KIMCO MAGNETICS DIVISION
 SAN MARCOS, CA 92069

DRAWN: N. FRENCH DATE: 12/03/98 TITLE: LINEAR ACTUATOR
 MECH CHECK: MCGHEE DATE: 02/16/06
 APPD: A. MORCOS DATE: 12/07/98
 FILE NO.: L:\TOP LEVEL\LA\

SIZE: D FSCM NO.: 55789 DWG NO.: LA08-10-000(LTR) REV: G
 SCALE: 8/1 SHEET: 1 OF 1

RoHS

LA08-10-000(LTR) G